

Gestetner

1200 dpi network output solution



L A S E R P R I N T E R

P7020




P7020

1200 DPI
LASER PRINTER



Choose Gestetner for
all your output solutions.

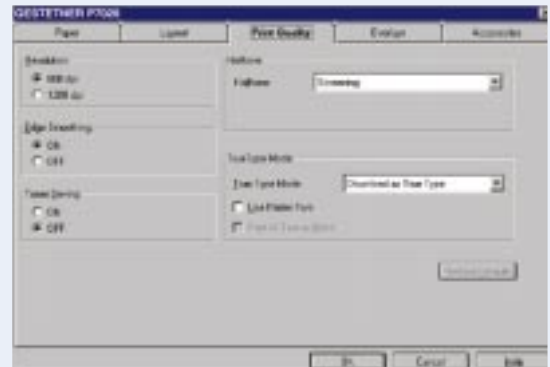

A POWERFUL PRINTING SOLUTION

The Gestetner P7020 Network Printer is actually an integral part of your total network output strategy. The P7020 delivers a productive yet affordable solution that allows you to easily add printing power wherever you need it most – your workgroup, your small office or right on your desk

KEEP IT SIMPLE

The Gestetner P7020 preserves premium office space by combining a compact footprint with a full front design. You'll be able to handle routine maintenance – like adding paper and replacing the imaging cartridge – without having to move, or walk around, the system.

The P7020's All-In-One Cartridge makes consumable replacement easy and reduces consumable inventory – enhancing your productivity and contributing to the P7020's overall low cost of ownership.

Proprietary Gestetner Net Vision Software lets you quickly install and monitor your Gestetner P7020, or any Gestetner connected system, on your network – whether it's a LAN or Peer-to-Peer. Net Vision allows you to "see" how your P7020 is performing via an icon on the Windows® Task Bar.

MAKE IT WORK

A powerful 133 MHz RISC processor combines with 20 PPM print speeds, a fast first print time of 5.5 seconds or less and up to 1200 dpi output for maximum efficiency and stellar image quality. An optional Network Interface Card supports Fast Ethernet LAN connections and provides seamless integration with today's most popular network environments.

PCL6 and PostScript 2 mean that you'll enjoy out-of-the-box compatibility with most business software. Auto Emulation Switching takes the guesswork out of printing – just select the correct print driver and the P7020 does the rest.

The P7020 can accommodate up to 1,350 sheets of paper from 4 sources – a real bonus for busy workgroups or offices. And, there's optional 11" x 17" printing for those times when larger images are a necessity. You can also add the optional Envelope Feeder, ensuring that the outside of your correspondence looks as good as the inside.

IT'S YOUR CHOICE

Choosing the right network output system can be a challenge. Fortunately, Gestetner can help you with all of your network output needs – whether it's black and white...color...multifunctional...or all three. For more information, contact your authorized Gestetner sales location.

www.gestetnerusa.com

Printer Specifications

Technology	Laser
Resolution	1200/600/300 dpi
Throughput	20 ppm letter
Weight	33.07 lbs.
Dimensions (WxDxH)	17.7" x 16.6" x 10.6"
Input Capacity	250 sheets + 100 sheet Multi-Tray; 1 optional 500 sheet 8 1/2" x 11" Max. Tray; 1 optional 500 sheet 11" x 17" Max. Tray; Optional envelope feeder installed in optional (Ltr.) paper tray
Output Capacity	250 sheets
Paper Size	3.88" x 5.83 – 11" x 17"
Paper Weight	Standard/Optional Trays 16 - 24 lbs. Standard Multi Tray 14 - 42 lbs.
Warm-up Time	39 seconds or less

Energy Star Tier 2 Specifications

Rating Power Specifications	120V, 60 Hz
Emi	FCC Class B, DOC
Sound Level	Standby - 48 db Operating - 64 db
Safety Standard	UL1950, CSA950

Controller Specifications

Printer Language	PCL5e, PCL6 & PS Level 2
Fonts	35 Intellifont, 10 TrueType Fonts, 1 Bitmap Font, 35 Type 1 Fonts
Memory	8 MB standard, additional 8/16/32 to 40 maximum
Hard Disk	Optional 1.6 GB
CPU	NEC R4300 133 Mz RISC Processor
Driver	PCL5e & PCL6: for Win 3.1x/95/98, Win NT 4.0 PS Level 2 PPD file: for Win 95/98, NT 4.0 & MAC OS 7.5 or later
Interface	Standard Bi-directional IEEE1284; Optional RS232C; Optional Network Interface Card 10 BaseT/100 BaseTX
Network Protocol	Optional NIC supports TCP/IP, IPX/SPX, AppleTalk
Utility Management	Net Vision included for Win 95/98 & Win NT 4.0; Controller supports SNMP - MIBII & industry standard MIB (RFC1759)

Gestetner



Gestetner Stamford, Connecticut 06904 Product specifications subject to change without notice.
All other trademarks are the property of their respective owners. Printed in U.S.A. (G1140) 50M 4/99